

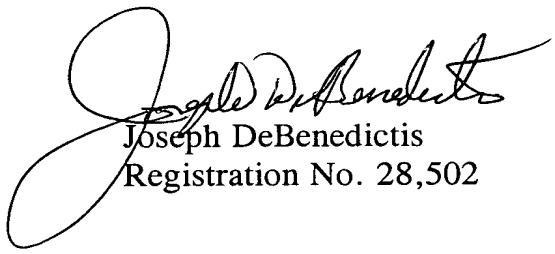
**REMARKS**

The specification has been amended by deleting the term "air layer" in unit D of table 3. Support for this amendment is found on page 33, lines 8-12 wherein it is stated: "In the unit D, the silicone sheet was provided to eliminate the air layer between the glass plate and the transparent protection plate and the antireflection film was adhered to the surface of the transparent protection plate at the side of an air interface".

Applicant submits herewith a certified copy of the priority document to complete the claim for priority.

Respectfully submitted,

Date: April 9, 2002

  
Joseph DeBenedictis  
Registration No. 28,502

BACON & THOMAS  
625 Slaters Lane, Fourth Floor  
Alexandria, Virginia 22314  
Phone: (703) 683-0500  
S:\Producer\jdb\SANKYO\TASAKI 021072\Prelim. Amend.wpd

Serial No. 10/021,072

**VERSION WITH MARKINGS TO SHOW CHANGES MADE**

**IN THE SPECIFICATION:**

The paragraph (i.e., table-3) which begins on the first line on page 32 and ends at the last line on page 32, has been revised as follows:

TABLE-3

| Unit | Construction   | Transmittance (%) | Reflectance (%) |
|------|--|-------------------|-----------------|
| A    | Resin Plate-Air Layer-Glass Plate                                  | 82.97             | 14.31           |
| B    | AR Layer-Resin Plate-Air Layer-Glass Plate                         | 85.76             | 11.17           |
| C    | Resin Plate-Transparent Sheet-Glass Plate                          | 86.51             | 7.64            |
| D    | AR Layer-Resin Plate- [ Air Layer- ] Transparent Sheet-Glass Plate | 95.75             | 4.01            |
| E    | AR Layer-Resin Plate-AR Layer-Air Layer-AR Layer-Glass Plate       | 92.12             | 4.33            |